



OPTIMASS 6000 Technical Datasheet

Sensor for mass flow

- The high performance meter for process industries
- Cryogenic, high temperature and high pressure options
- Supreme liquid and gas performance with CT approval



The documentation is only complete when used in combination with the relevant documentation for the signal converter.

1 Product features	3
1.1 The solution for extended temperature applications	3
1.2 Features and options	5
1.3 Meter / converter combinations	6
1.4 Measuring principle (twin tube)	6
2 Technical data	8
2.1 Technical data.....	8
2.2 Measuring accuracy	15
2.3 Guidelines for maximum operating pressure.....	16
2.4 Dimensions and weights	22
2.4.1 Flanged versions.....	22
2.4.2 NAMUR dimensions	33
2.4.3 Hygienic versions	34
2.4.4 Heating jacket version	37
2.4.5 Purge port option	38
2.4.6 Burst disc option.....	39
3 Installation	40
3.1 Intended use	40
3.2 Mounting restrictions	40
3.2.1 General installation principles	40
4 Notes	42

1.1 The solution for extended temperature applications

A high level of performance, together with a wide operating temperature range up to 400°C / 752°F, makes the OPTIMASS 6000 the ideal choice for mass flow measurement in a wide variety of applications.

Designed to meet the requirements of general purpose liquid and gas applications, the extended low temperature range of -200°C / -328°F also makes the 6000 suitable for Liquid Natural Gas (LNG) and cryogenic applications.

Combined with the power of the MFC 400, the OPTIMASS 6000 will provide accurate measurement of volume, mass, density and concentration.



- ① Standard flange process connections available.
- ② Modular electronics with a range of output options.
- ③ Comprehensive diagnostic capabilities.



- ① Remote terminal box

Features:

- Innovative twin V-tube design
- Temperature range -200°C to +400°C
- Optional insulation / heating jacket
- Compact envelope
- Optimised flow divider for minimum pressure loss
- Modular electronics concept: electronics and sensor are easy to replace
- Self draining when mounted vertically
- Stability with entrained gas, even with gas concentrations 0...100%

Industries:

- Water and waste water
- Chemical
- Oil and gas
- Food and beverage
- Pharmaceutical

Applications:

- Crystallising, solidifying and cryogenic products
- Tanker loading
- General purpose applications
- CIP and SIP >130°C
- Liquid Natural Gas (LNG)
- Supercritical gases

1.2 Features and options

Features




- Available as compact or remote.
- Nominal flow rates up to 1000000 kg/h / 36743 lb/min.
- Self draining, when mounted vertically.
- With advanced Entrained Gas Management (EGM™) the meter maintains operation over a wide range of gas fractions and complex flow conditions.

Connection options



- Standard flanges with ratings up to 1500 lb / PN160.
- Supports a wide range of industry standard hygienic connections.
- Optional sealing faces.
- NAMUR NE132 flange lengths

Heating jacket and purge port

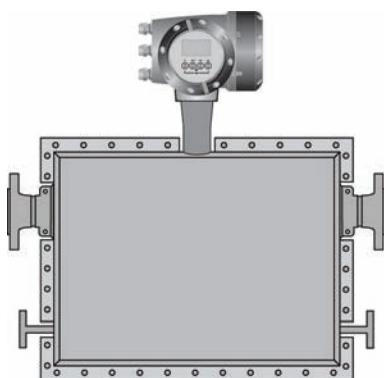

Heating jacket

- For use with temperature dependant products.
- Prevents solidification of process product.
- The heating case can also be used as a cryogenic insulation case.

Purge port


- Allows hazardous chemicals to be drained away safely.

1.3 Meter / converter combinations

Converter	MFC 400		
Configuration	Compact	Remote field	Remote wall
OPTIMASS 6000	6400C	6400F	6400W


1.4 Measuring principle (twin tube)

Meter from the side, showing tube layout

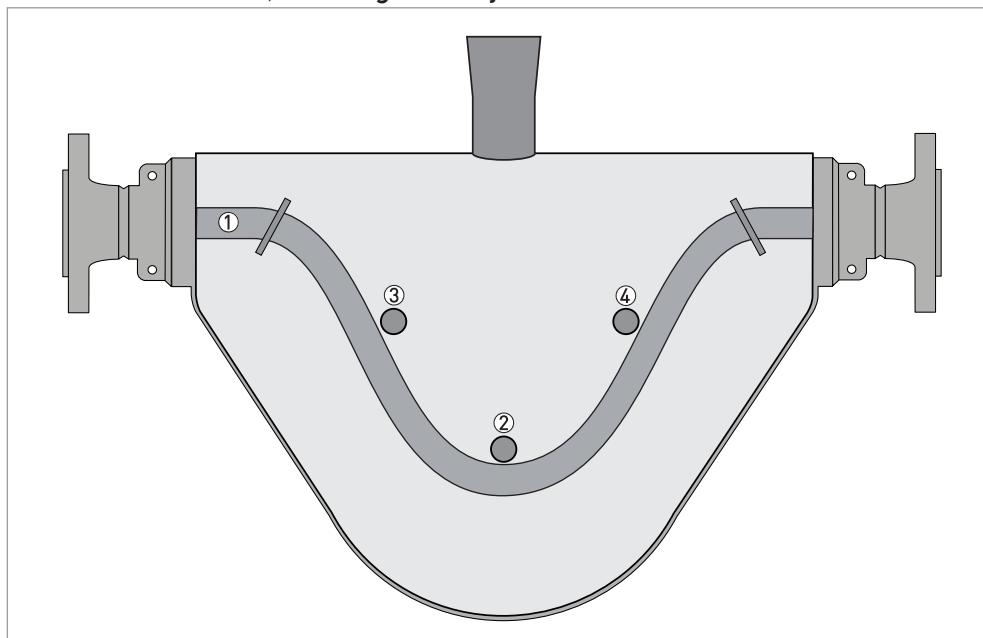


- ① Measuring tubes
- ② Drive coil
- ③ Sensor 1
- ④ Sensor 2

Static meter not energised and with no flow

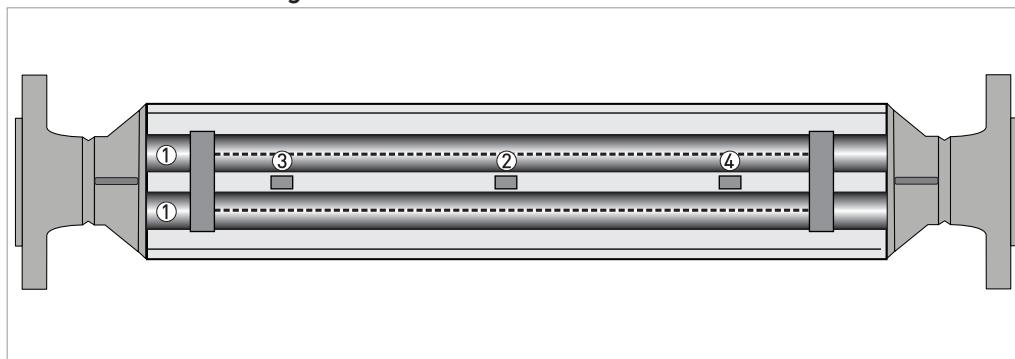


- ① Measuring tubes
- ② Drive coil
- ③ Sensor 1
- ④ Sensor 2

A Coriolis twin tube mass flowmeter consists of two measuring tubes ① a drive coil ② and two sensors (③ and ④) that are positioned either side of the drive coil.

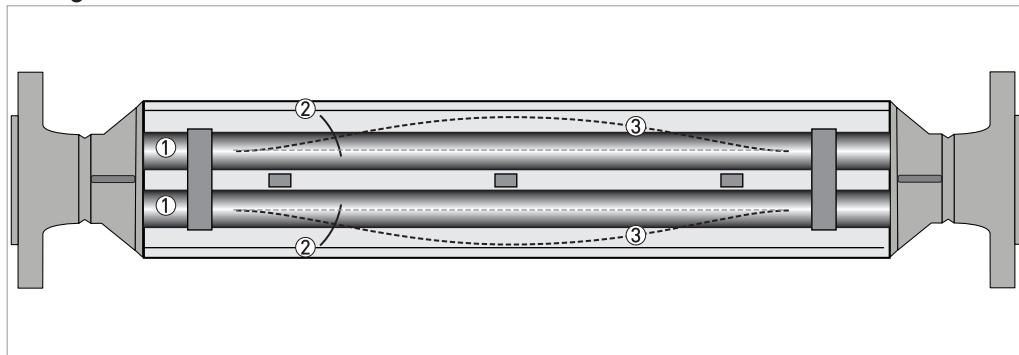Energised meter

- ① Measuring tubes
- ② Direction of oscillation
- ③ Sine wave

When the meter is energised, the drive coil vibrates the measuring tubes causing them to oscillate and produce a sine wave ③. The sine wave is monitored by the two sensors.

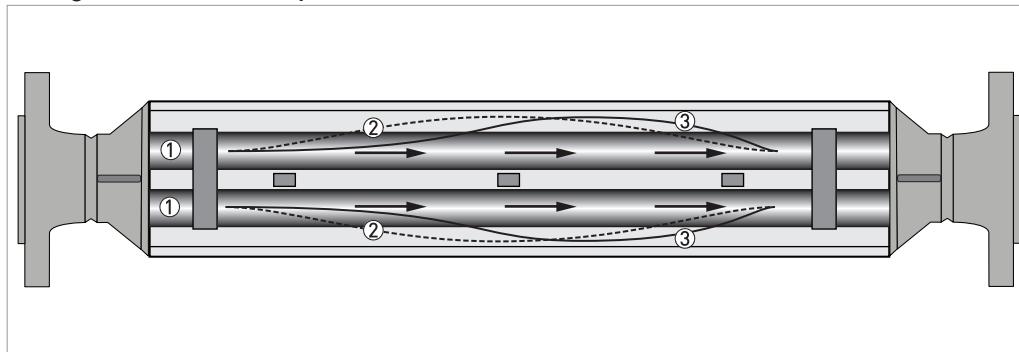Energised meter with process flow

- ① Process flow
- ② Sine wave
- ③ Phase shift

When a fluid or gas passes through the tubes, the coriolis effect causes a phase shift in the sine wave that is detected by the two sensors. This phase shift is directly proportional to the mass flow.

Density measurement is made by evaluation of the frequency of vibration and temperature measurement is made using a Pt500 sensor.

2.1 Technical data

- The following data is provided for general applications. If you require data that is more relevant to your specific application, please contact us or your local sales office.
- Additional information (certificates, special tools, software,...) and complete product documentation can be downloaded free of charge from the website (Downloadcenter).

Measuring system

Measuring principle	Coriolis mass flow
Application range	Mass flow and density measurement of fluids, gases and solids
Measured values	Mass, density, temperature
Calculated values	Volume, referred density, concentration, velocity
Sensor model range	
Stainless Steel 316L 08...250	Compact / remote 100 barg @ 20°C / 1450 psig @ 68°F, temp. range -70°C...+230°C / -94°F...+446°F
	Remote only 100 barg @ 20°C / 1450 psig @ 68°F, temp. range -50°C...+400°C / -58°F...+752°F
	Remote only 100 barg @ 20°C / 1450 psig @ 68°F, temp. range -200°C...+40°C / -364°F...+104°F
Hastelloy® 08...80	Compact / remote 200 barg @ 20°C / 2900 psig @ 68°F, temp. range -70°C...+230°C / -58°F...+446°F
Duplex Stainless Steel 100...200	Compact / remote 200 barg @ 20°C / 2900 psig @ 68°F, temp. range -50°C...+230°C / -58°F...+446°F

Design

Basic	System consists of a measuring sensor and a converter to process the output signal
Features	Fully welded maintenance free sensor with twin V-shaped measuring tube
Variants	
Compact version	Integral converter
Remote version	Available with field or wall versions of the converter

Measuring accuracy

Mass (standard)	
Liquid ($\geq 20:1$ of nominal flow rate)	$\pm 0.1\%$ of actual measured flow rate
Liquid ($< 20:1$ of nominal flow rate)	\pm zero stability (see zero stability below)
Gas	$\pm 0.35\%$ of actual measured flow rate + zero stability
Mass (optional) ①	
Liquid ($\geq 10:1$ of nominal flow rate)	$\pm 0.05\%$ of actual measured flow rate
Liquid ($< 10:1$ of nominal flow rate)	\pm zero stability (see zero stability below)
Repeatability	
Liquid	Better than 0.05% plus zero stability (includes the combined effects of repeatability, linearity and hysteresis)
Gas	Better than 0.2% plus zero stability (includes the combined effects of repeatability, linearity and hysteresis)

Zero stability				
Meter size	Standard temperature	High temperature		
08	< 0.03 kg/h	< 0.05 kg/h		
10	< 0.06 kg/h	< 0.10 kg/h		
15	< 0.19 kg/h	< 0.30 kg/h		
25	< 0.95 kg/h	< 1.52 kg/h		
50	< 1.8 kg/h	< 2.8 kg/h		
80	< 3.9 kg/h	< 6.24 kg/h		
100	< 8.8 kg/h	< 14.0 kg/h		
150	< 16.0 kg/h	< 25.6 kg/h		
200	< 30.0 kg/h	< 44.0 kg/h		
250	< 50.0 kg/h	< 80.0 kg/h		
Reference conditions				
Product	Water			
Temperature	+20°C / +68°F			
Operating pressure	1 barg / 14.5 psig			
Effect on sensor zero point caused by a shift in process temperature				
Standard temperature range				
All materials sizes 08...10	0.0010% of nominal flow per 1°C / 0.00056% of nominal flow per 1°F			
All materials sizes 15...250	0.00075% of nominal flow per 1°C / 0.00042% of nominal flow per 1°F			
High temperature range				
All materials sizes 08...250	0.008% of nominal flow per 1°C / 0.0044% of nominal flow per 1°F			
Pressure effect on mass flow rate				
All materials sizes 08...50	0.005% per 1 barg / 0.00034 % per 1 psig			
All materials sizes 80...100	0.0055% per 1 barg / 0.00038 % per 1 psig			
All materials sizes 150...250	0.008% per 1 barg / 0.00055 % per 1 psig			
Density				
Measuring range	100...3000 kg/m ³ / 6...187 lb/ft ³			
Accuracy	±1 kg/m ³ / ±0.06 lb/ft ³			
On site calibration	±0.2 kg/m ³ / ±0.012 lb/ft ³			
Process temperature effect	0.015 g/l per 1°C / 0.0083 g/l per 1°F			
Temperature				
Accuracy	± 0.5°C / ±0.9°F (± 0.5% of reading)			

Operating conditions

Nominal flow rates (1 barg / 14.5 psig pressure drop)	
08	600 kg/h / 22 lb/min
10	1200 kg/h / 44 lb/min
15	3800 kg/h / 139 lb/min
25	19000 kg/h / 698 lb/min
50	35000 kg/h / 1286 lb/min
80	78000 kg/h / 2866 lb/min
100	175000 kg/h / 6430 lb/min
150	320000 kg/h / 11758 lb/min

200	550000 kg/h / 20209 lb/min
250	1000000 kg/h / 36743 lb/min
	Assumes operating density 1000 kg/m ³ / 62.4 lb/ft ³
	For Hastelloy® meters, assume a pressure drop of 1.15 barg
Maximum flow rates	
All meters	150% of nominal flow rate

Environmental

Ambient temperature		
Compact meter	Standard converter	SIL capable converter
Aluminium converter	-40...+65°C / -40...+149°F	-40...+55°C / -40...+131°F
Stainless Steel converter	-40...+55°C / -40...+131°F	-40...+55°C / -40...+131°F
Remote meter	Standard converter	SIL capable converter
Standard temperature range	-40...+65°C / -40...+149°F	-40...+55°C / -40...+131°F
Cryogenic temperature range	-20...+65°C / -4...+149°F	-40...+55°C / -40...+131°F
Hazardous Area versions	Refer to temperature limits	
Protection category (Acc. to EN 60529)	IP 67, NEMA 4X	
Vibration (acc IEC 60068-2-6)	10-150-10 Hz with 0.15 mm for 10...60 Hz, 20 m/s ² for 60...150 Hz	

Process temperatures

Standard temperature range (flange connections)	Extended stem	Short stem
Safe area	-70...+230°C / -94...+446°F	-70...+150°C / -94...+302°F
Hazardous area	-50...+230°C / -58...+446°F	-50°C...+150°C / -58...+302°F
High temperature range	-50...+400°C / -58...+752°F	N/A
Cryogenic temperature range	-200...+40°C / -328...+104°F	-200...+40°C / -328...+104°F
Standard temperature range (hygienic connections)	Extended stem	Short stem
Safe area	-70...+150°C / -94...+302°F	-70...+150°C / -94...+302°F
Hazardous area	-50...+150°C / -58...+302°F	-50...+150°C / -58...+302°F

Nominal pressure at 20°C / 68°F

Measuring tube	SS 316 / 316L	Hastelloy® C22 / S31803
FM / PED	-1...100 barg / -14.5...1450 psig	-1...200 barg / -14.5...2900 psig
CRN / ASME B31.3	-1...100 barg / -14.5...1450 psig	Pending

Outer casing burst pressure ②

08	\approx 100 barg
10	
15	
25	
50	\approx 70 barg
80	
100	\approx 10 barg
150	
200	
250	

If the process temperature is higher than 20°C / 68°F, the burst pressure will be lower. For more information please contact the manufacturer.

Fluid properties	
Permissible physical condition	Liquids, gases, slurries
Permissible gas content (volume)	Contact manufacturer for information.
Permissible solid content (volume)	Contact manufacturer for information.
Installation conditions	
Inlet / outlet runs	None required

Materials

Stainless Steel (316 / 316L) meter	
Measuring tubes / Flanges	Stainless Steel AISI 316 / 316L (1.4401 / 1.4404) dual certified
Spigots	Stainless Steel CF3M (1.4409)
Bridge	Stainless Steel AISI 304 / 304L (1.4301 / 1.4307) dual certified or AISI 316 / 316L (1.4401 / 1.4404) dual certified
Outer casing	Stainless Steel AISI 316 / 316L (1.4401 / 1.4404) dual certified
Stainless Steel (S31803) meter	
Measuring tubes / Flanges	Stainless Steel UNS 31803 (1.4462)
Spigots	Stainless Steel J92205 (1.4470)
Bridge	Stainless Steel AISI 304 / 304L (1.4301 / 1.4307) dual certified or AISI 316 / 316L (1.4401 / 1.4404) dual certified
Outer casing	Stainless Steel AISI 316 / 316L (1.4401 / 1.4404) dual certified
Hastelloy® C22 meter	
Measuring tubes / raised face	Hastelloy® C22
(Backing) flanges	Stainless Steel AISI 316 / 316L (1.4401 / 1.4404) dual certified
Bridge	Stainless Steel AISI 316 / 316L (1.4401 / 1.4404) dual certified
Outer casing	Stainless Steel AISI 316L (1.404) dual certified
Heating jacket version	
Heating loop and insulation jacket	Stainless Steel AISI 316 (1.4401)
All versions	
Junction box (remote version)	Die-cast Aluminium (polyurethane coating) Optional Stainless Steel 316 (1.4401)

Process connections

Flange	
DIN (EN 1092-1 2007)	DN10...300 / PN16...160
ASME (B616.5)	½...12" / ASME 150...1500
JIS (2220 2001)	10A...300A / 10...20K (10K maximum allowable temperature 300°C / 572°F)
Hygienic (08...50 only)	
Tri-clover	¾...4"
Tri-clamp DIN 32676	DN15..100
Tri-clamp ISO 2852	1...4"
DIN 11864-2 Form A (female)	DN15...100
Male thread DIN 11851 (threaded sanitary connection)	DN15...100
Male thread SMS	25...100 mm / 1...4"

Electrical connections

Electrical connections	For full details, including: power supply, power consumption etc., see technical data for the relevant signal converter.
I/O	For full details of I/O options, including data streams and protocols, see technical data for the relevant signal converter.

Approvals

CE	The device fulfils the statutory requirements of the CE directive. The manufacturer certifies that these requirements have been met by applying the CE mark.
CRN	acc to: ASME B31.3 (most recent and up to date version)
NACE	MR0175 / ISO 15156 ("Sulphide Stress Corrosion Cracking Resistant Metallic Materials for Oil Field Equipment") and MR0103 ("Materials Resistant to Sulfide Stress Cracking in Corrosive Petroleum Refining Environments") (most recent and up to date versions)
Custody transfer	Measuring Instruments Directive (MID) MI 002 and MI 005 (most recent and up to date version) OIML R117-1 OIML R137 (pending) Compliant with API and AGA
Functional safety	SIL2 / SIL3 (acc to: IEC 61508)

ATEX (most recent and up to date version)

OPTIMASS 6400C non Ex i signal outputs

Ex d connection compartment	II 1/2 G Ex d ia IIC T6....T1 Ga/Gb
	II 2 D Ex t IIIC T270°C Db
Ex e connection compartment	II 1/2 G Ex de ia IIC T6....T1 Ga/Gb
	II 2 D Ex t IIIC T270°C Db

OPTIMASS 6400C Ex i signal outputs

Ex d connection compartment	II 1/2(1) G Ex d ia [ia Ga] IIC T6....T1 Ga/Gb
	II 2(1) D Ex t [ia Da] IIIC T270°C Db
Ex e connection compartment	II 1/2(1) G Ex de ia [ia Ga] IIC T6....T1 Ga/Gb
	II 2(1) D Ex t [ia Da] IIIC T270°C Db
OPTIMASS 6000 / 6000F	II 1 G Ex ia IIC T6...T1 Ga II 1 D Ex ia IIIC T270°C Da II 1 D Ex ia IIIC T440°C Da

① This option is not available when the converter is being used in SIL mode

② For information only. Secondary pressure containment is NOT supplied on this meter

ATEX temperature limits

OPTIMASS 6000 / 6000F with or without heating jacket / insulation.			
Ambient temp. T _{amb} °C	Medium temp. T _m °C	Temp. class	Max. Surface temp. °C
-40...40	-50...40	T6	T80
	-50...150	T3	T190
	-50...230	T2-T1	T270
-40...55	-50...40	T6	T80
	-50...150	T3	T190
	-50...230	T2-T1	T270
-40...65	-50...40	T6	T80
	-50...150	T3	T190
	-50...230	T2-T1	T270
Cryogenic version			
-20...65	-200...40	T6-T1	T80
OPTIMASS 6400C with aluminium converter housing, with or without heating jacket / insulation			
-40...40	-50...40	T6	T80
	-50...150	T3	T190
	-50...230	T2-T1	T270
-40...50	-50...40	T6	T80
	-50...150	T3	T190
	-50...230	T2-T1	T270
-40...65	-50...65	T4-T1	T105
Cryogenic version			
-40...65	-200...40	T6-T1	T80
OPTIMASS 6400C with SS converter housing, with or without heating jacket / insulation.			
-40...40	-50...40	T6	T80
	-50...150	T3	T190
	-50...230	T2-T1	T270
-40...50	-50...40	T6	T80
	-50...150	T3	T190
	-50...230	T2-T1	T270
-40...60	-50...60	T4-T1	T100
Cryogenic version			
-25...+60	-200...40	T6-T1	T80
High temperature versions			
OPTIMASS 6000F - HT with aluminium junction box, heating jacket and insulation			
-40...40	-50...40	T6	T80
	-50...230	T2	T270
	-50...400	T1	T440
-40...55	-50...40	T6	T80
	-50...230	T2	T270
	-50...400	T1	T440

2 TECHNICAL DATA

OPTIMASS 6000

-40...60	-50...40	T6	T80
	-50...230	T2	T270
	-50...400	T1	T440
-40...65	-50...350	T1	T390
OPTIMASS 6000F - HT with SS junction box, heating jacket and insulation			
-40...40	-50...40	T6	T80
	-50...230	T2	T270
	-50...400	T1	T440
-40...50	-50...40	T6	T80
	-50...230	T2	T270
	-50...400	T1	T440
-40...55	-50...40	T6	T80
	-50...230	T2	T270
	-50...400	T1	T440
-40...60	-50...350	T1	T390
OPTIMASS 6000F - HT with aluminium or SS junction box, insulation but no heating jacket			
-40...40	-50...40	T6	T80
	-50...230	T2	T270
	-50...400	T1	T440
-40...55	-50...40	T6	T80
	-50...230	T2	T270
	-50...400	T1	T440
-40...65	-50...40	T6	T80
	-50...230	T2	T270
	-50...400	T1	T440

Maximum end loadings (Stainless Steel 316 / 316L)

	S08 / S10	S15	S25	S50	S80	S100	S150	S200	S250	
Flanges										
20°C	40 barg	15 kN	25 kN	38 kN	48 kN	99 kN	130 kN	250 kN	300 kN	350 kN
	100 barg	12 kN	17 kN	19 kN	15 kN	20 kN	100 kN	120 kN	150 kN	200 kN
230°C	32 barg	7 kN	12 kN	18 kN	25 kN	45 kN	60 kN	50 kN	100 kN	150 kN
	60 barg			5 kN				20 kN		
400°C	27.4 barg	5 kN	6 kN	10 kN	12 kN	20 kN	50 kN	80 kN	100 kN	150 kN
	40 barg	4 kN		5 kN				20 kN		
Hygienic (all connections)										
150°C	10 barg	5 kN	9 kN	12 kN	12 kN	18 kN	21 kN	N/A	N/A	N/A
140°C	40 barg	3 kN	5 kN	5 kN	N/A	N/A	N/A	N/A	N/A	N/A
	25 barg	N/A	N/A	N/A	9 kN	N/A	N/A	N/A	N/A	N/A
	16 barg	N/A	N/A	N/A	N/A	12 kN	12 kN	N/A	N/A	N/A
Heating jacket connections										
①		0 kN	0 kN	0 kN	0 kN					

① All temperature and pressure ranges

Maximum end loadings (Hastelloy® and Stainless Steel UNS S31803)

	H08 / H10	H15	H25	H50	H80	D100	D150	D200
Flanges (not including CRN)								
20°C	200 barg	12 kN	17 kN	19 kN	15 kN	20 kN	100 kN	120 kN
230°C	145 barg		5 kN				20 kN	
Flanges (CRN regions)								
20°C	200 barg ①	12 kN	17 kN	19 kN	15 kN	20 kN	60 kN	30 kN
230°C	145 barg ②		5 kN				20 kN	
Heating jacket connections								
③		0 kN	0 kN					


① D200 limited to 180 barg at 20°C

② D100 and D150 limited to 120 barg at 230°C. D200 limited to 110 barg at 230°C

③ All temperature and pressure ranges

- DN08...50 [axial] loads have been calculated, based on 316L schedule 40 process pipework, where un-radiographed butt welds have been used in pipe joints.
- DN80...250 [axial] loads have been calculated, based on 316L schedule 80 process pipework, where un-radiographed butt welds have been used in pipe joints.
- The loads shown are the maximum permitted static load. If loads are cycling (between tension and compression) these loads should be reduced. For advice, consult the manufacturer.

2.2 Measuring accuracy

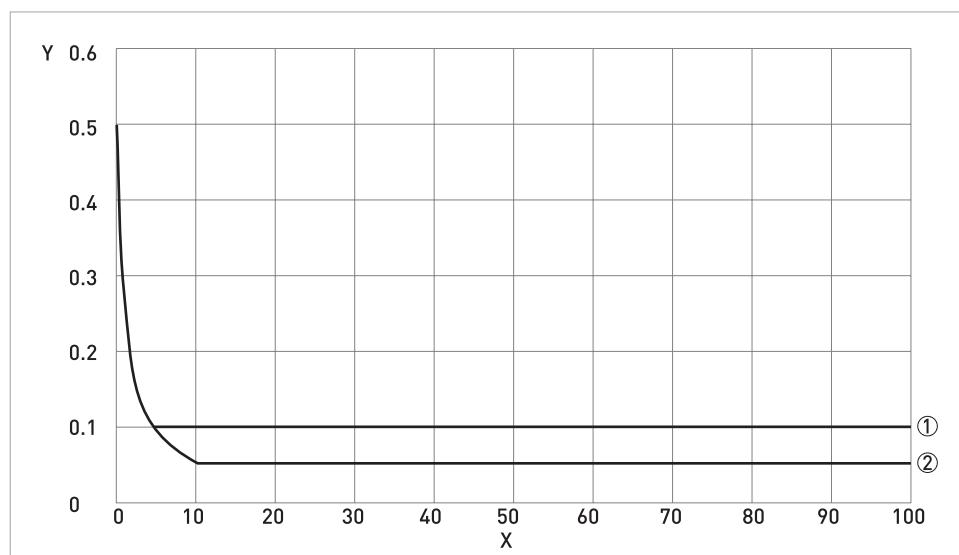

X nominal flow rate [%]

Y measuring error [%]

① Standard measuring accuracy

② Optional measuring accuracy (not available in SIL mode)

Measuring error

The measuring error is obtained from the combined effects of accuracy and zero stability.

Reference conditions

Product	Water
Temperature	+20°C / +68°F
Operating pressure	1 barg / 14.5 psig

2.3 Guidelines for maximum operating pressure

Always make sure that the meter is used within its operating limits.

Pressure / temperature de-rating (metric) for meters with SS 316 measuring tubes. Standard temperature range.

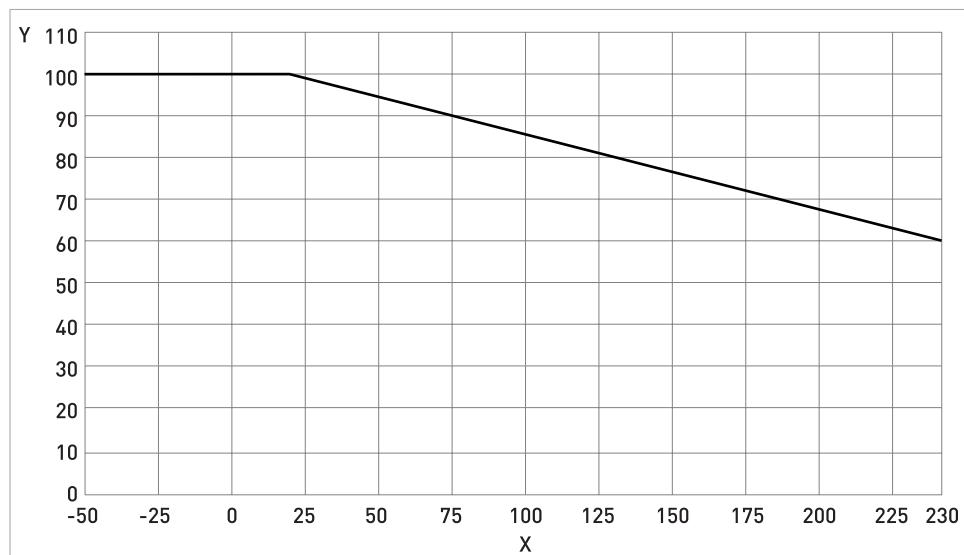


Figure 2-1: Measuring tube PED certification

X temperature [°C]

Y pressure [barg]

**Pressure / temperature de-rating (imperial) for meters with SS 316 measuring tubes.
Standard temperature range.**


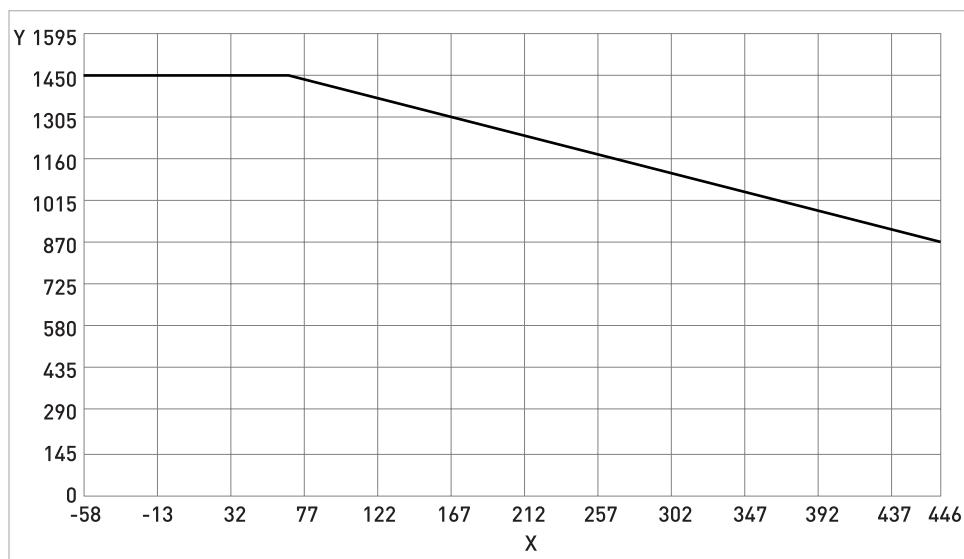


Figure 2-2: Measuring Tube PED certification


X temperature [°F]
Y pressure [psig]

**Pressure / temperature de-rating (metric) for meters with SS 316, PED certified
measuring tubes. High temperature range.**

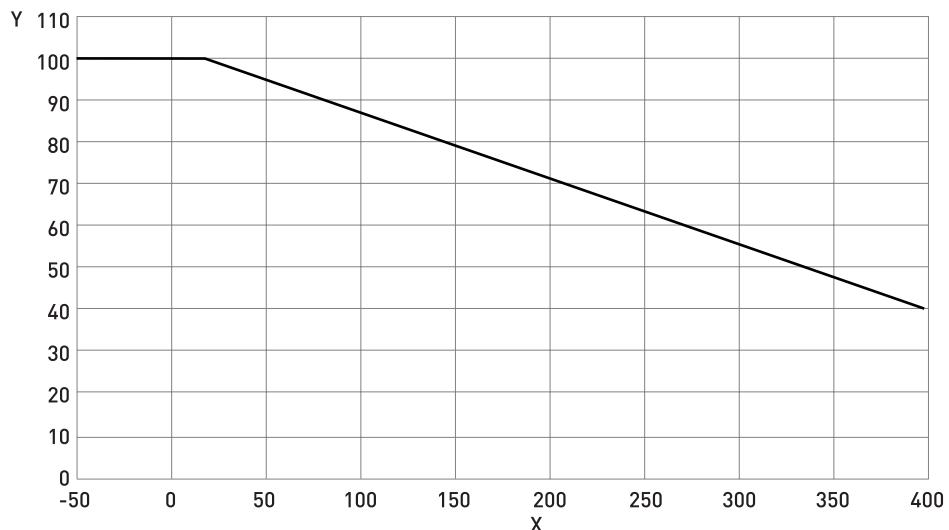


X temperature [°C]
Y pressure [barg]

Pressure / temperature de-rating (imperial) for meters with SS 316, PED certified measuring tubes. High temperature range.

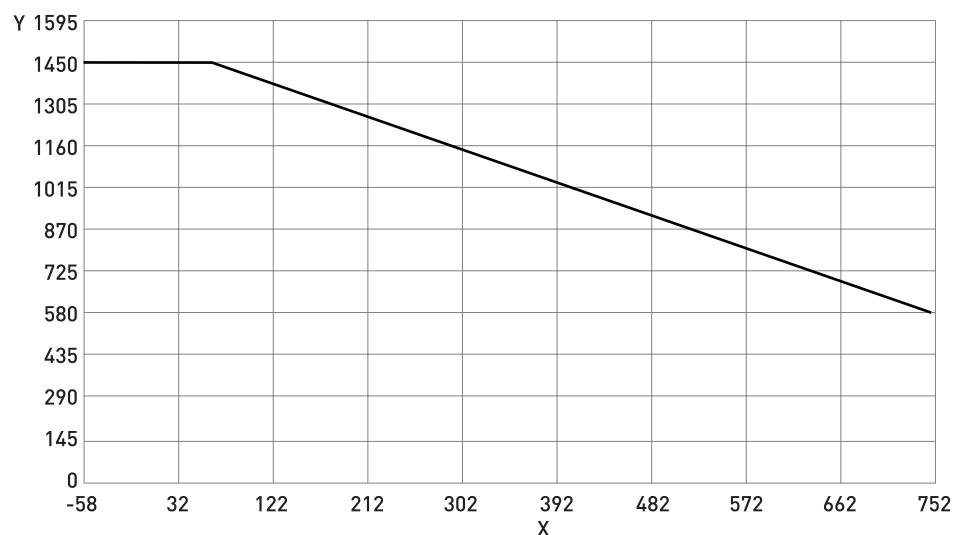

X temperature [°F]
Y pressure [psig]


Pressure / temperature de-rating (metric) for meters with SS 31803 and Hastelloy® C22, PED certified measuring tubes. Standard temperature range

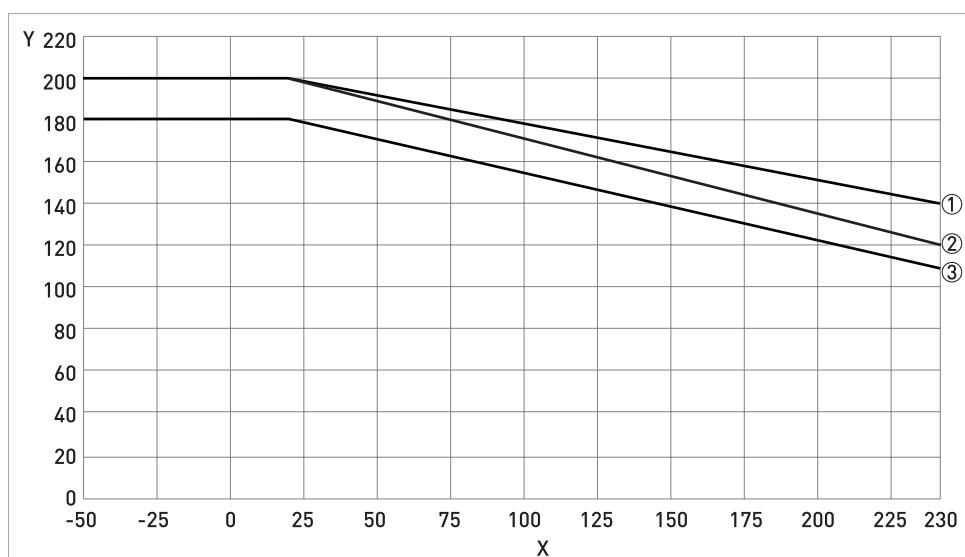

X temperature [°C]
Y pressure [barg]

- ① PED / CRN H08...80
- ② CRN D100...150
- ③ CRN D200

Pressure / temperature de-rating (imperial) for meters with SS 31803 and Hastelloy® C22, PED certified measuring tubes. Standard temperature range.

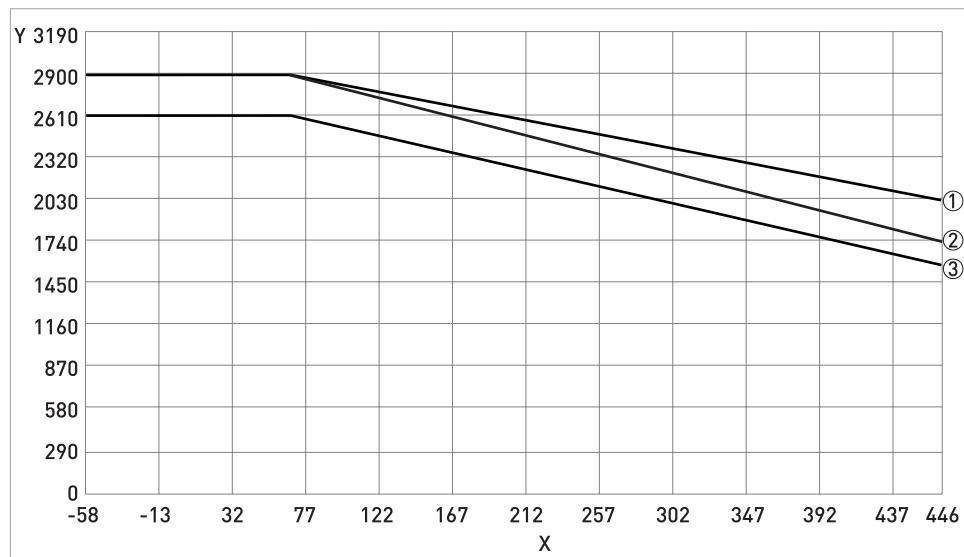

X temperature [°F]


Y pressure [psig]

① PED / CRN H08...80

② CRN D100...150

③ CRN D200


Pressure / temperature de-rating (metric) for meters with SS 316, PED certified measuring tubes. Cryogenic temperature range.

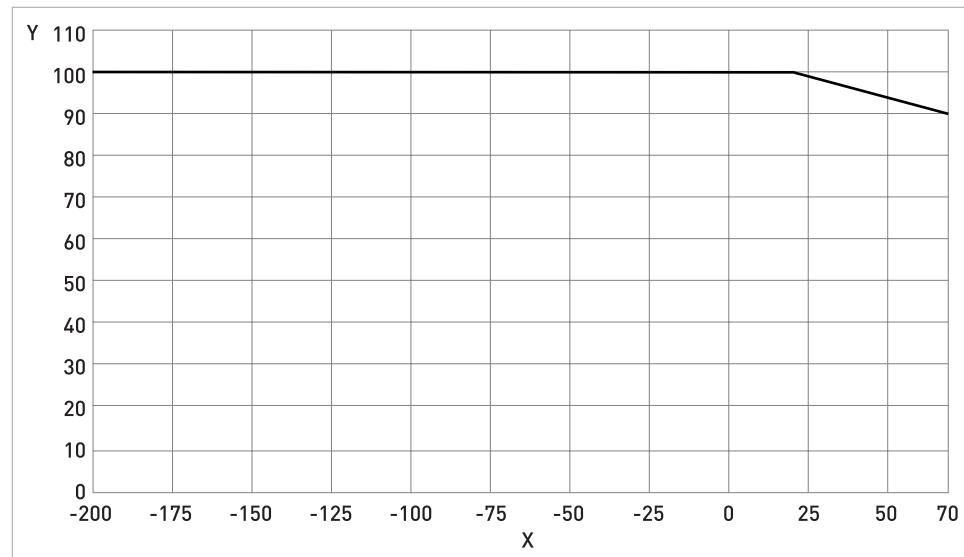

X temperature [°C]

Y pressure [barg]

**Pressure / temperature de-rating (imperial) for meters with SS 316 measuring tubes
PED certified. Cryogenic temperature range.**

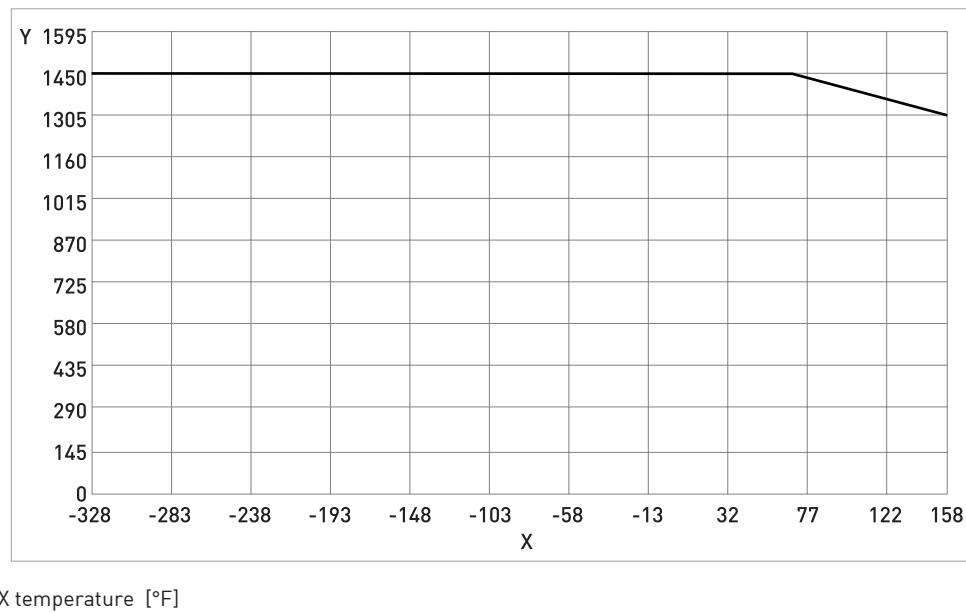


X temperature [°F]
Y pressure [psig]

Flanges

- DIN flange ratings are based on EN 1092-1 2007 table G.4.1 material group 14E0
- ASME flange ratings are based on ASME B16.5 2003 table 2 material group 2.2
- JIS flange ratings are based on JIS 2220: 2001 table 1 division 1 material group 022a
- JIS 10K flanges are limited to a maximum temperature of 300°C / 572°F


Pressure / temperature de-rating (metric) for meters with hygienic connections.

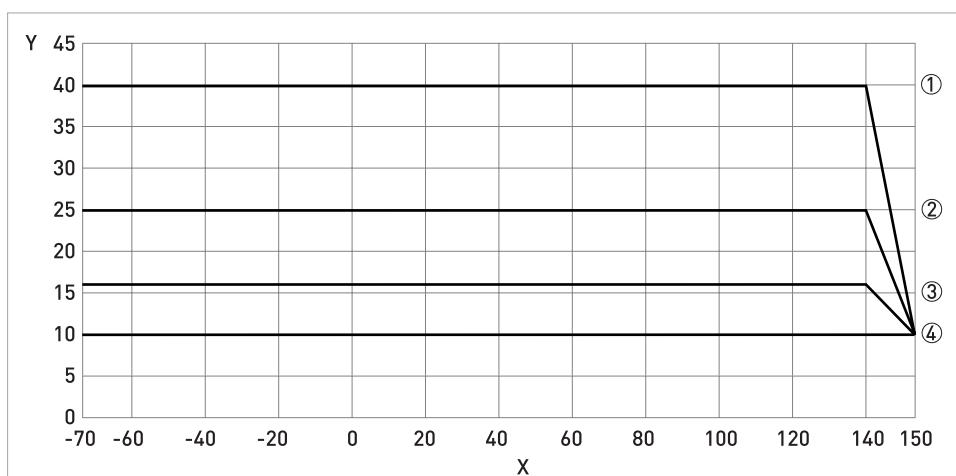

X temperature [°C]
Y pressure [barg]

- ① SMS 1...1½", DIN 11851 DN10...40
- ② SMS 2", Tri-clamp DN10...40, DIN 11864-2 DN10...40, DIN 11851 DN50...65
- ③ SMS 3", Tri-clamp DN50...65, DIN11864-2, DIN11864-2 DN50...100, DIN11851 DN80...100
- ④ SMS 4", Tri-clamp DN80...150, DIN 11864-2 DN125...150, DIN11851 DN125...150

Pressure / temperature de-rating (imperial) for meters with hygienic connections.

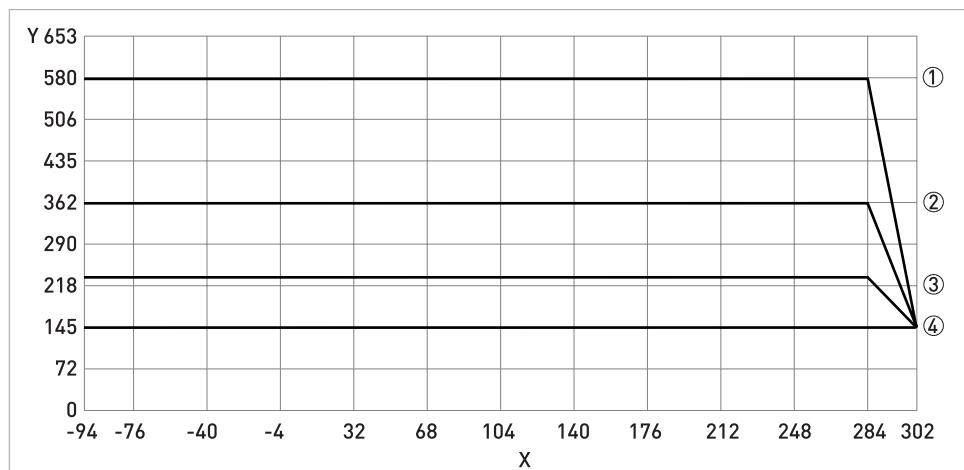

X temperature [°F]

Y pressure [psig]

- ① SMS 1...1½", DIN 11851 DN10...40
- ② SMS 2", Tri-clamp DN10...40, DIN 11864-2 DN10...40, DIN 11851 DN50...65
- ③ SMS 3", Tri-clamp DN50...65, DIN11864-2 DN50...100, DIN11851 DN80...100
- ④ SMS 4", Tri-clamp DN80...150, DIN 11864-2 DN125...150, DIN11851 DN125...150

Notes

- The maximum operating pressure will be either the flange / hygienic connection rating or the measuring tube rating, **WHICHEVER IS THE LOWER!**
- The manufacturer recommends that the seals are replaced at regular intervals. This will maintain the hygienic integrity of the connection.

2.4 Dimensions and weights


2.4.1 Flanged versions

Meter weights

	kg									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
Aluminium (compact)	9.3	10.1	12.9	23.5	29.4	58.9	94.3	193.6	443.6	911.2
Stainless Steel (compact)	15.2	16	18.8	29.4	35.3	64.8	100.2	199.5	449.5	917.1
Aluminium (remote)	5.8	6.6	9.4	19.9	25.9	55.4	90.8	190.1	440	907.6
Stainless Steel (remote)	6.6	7.3	10.2	20.7	26.6	56.1	91.5	191.5	440.8	908.4
Heating jacket add	3.1		4.5	7	7.9	12.7	15.7	27.6		N/A

	lbs									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
Aluminium (compact)	20.5	22.3	28.4	51.8	64.8	129.8	207.9	426.8	978	2008.8
Stainless Steel (compact)	33.5	35.3	41.4	64.8	77.8	142.9	220.9	440.7	991	2021.9
Aluminium (remote)	12.8	14.5	20.7	43.9	57.1	122.1	200.2	419.1	970	2001
Stainless Steel (remote)	14.55	16.1	22.5	45.6	58.6	123.7	201.7	422.2	971.8	2002.7
Heating jacket add	6.8		9.9	15.4	17.4	28	34.6	60.8		N/A

The weights shown are for meters fitted with PN40 flanges. Smaller or larger flange sizes will affect the overall weight. For further information, please contact the manufacturer.

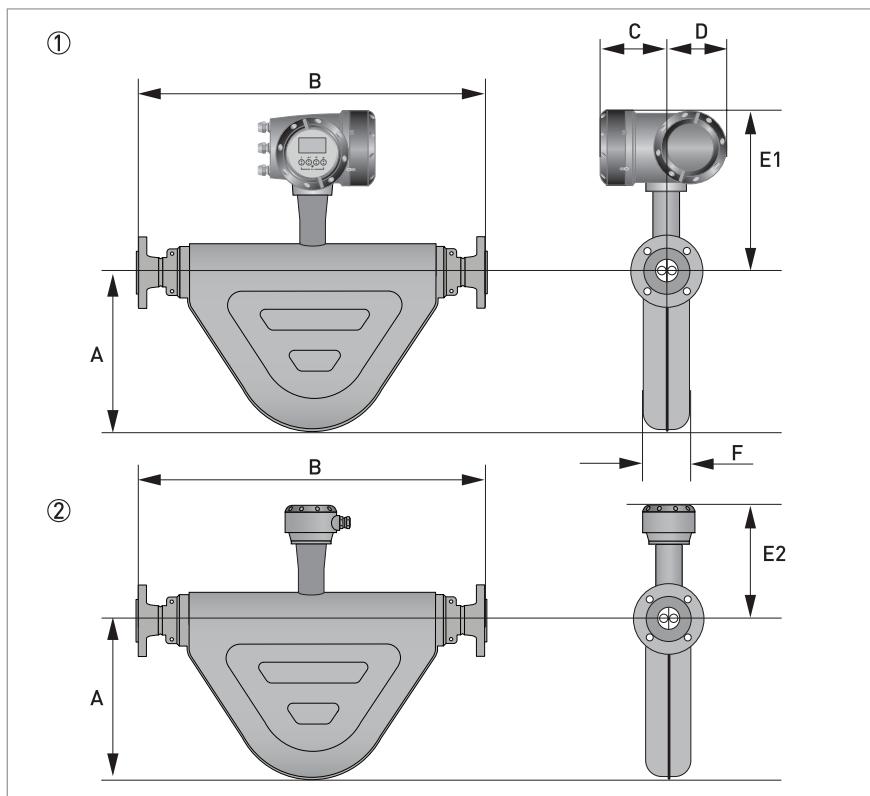Meter dimensions

- ① Compact version
 ② Remote version

General dimensions

	mm									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
A ±3	156		186	282	326	411	450	555	675	805
C					137					
D					123.5					
E1 ±3 ①	289		290		307		342	369	394	436
E1 ±3 ②	375		376		393		428	455	480	522
E2 ±3 ③	209		210		230		262	289	314	356
E2 ±3 ④	295		296		316		348	375	400	442
E2 ±3 ⑤	335		336		353		388	415	440	482
F ±2	81			118	130	188	219	275	355	508

- ① compact 150°C (short stem)
 ② compact 230°C (extended stem)
 ③ remote 150°C (short stem)
 ④ remote 230°C (extended stem)
 ⑤ remote 400°C (extended stem)

	inches									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
A ±0.11	6.14	7.3	11.1	12.8	16.2	17.7	21.8	26.6	31.7	
C					4.9					
D					5.4					
E1 ±0.12 ①	11.4	11.4	12.0		13.5	14.5	15.5	17.2	20.2	
E1 ±0.12 ②	14.8	14.8	15.5		16.8	17.9	18.9	20.5	23.5	
E2 ±0.12 ③	8.2	8.3	9.0		10.3	11.4	12.4	10.0	17.0	
E2 ±0.12 ④	11.6	11.6	12.4		13.7	14.8	15.7	17.4	20.4	
E2 ±0.12 ⑤	13.2	13.2	13.9		15.3	16.3	17.3	19	22	
F ±0.08	3.2		4.6	5.1	7.4	8.6	10.8	14	20	

① compact 302°F (short stem)

② compact 446°F (extended stem)

③ remote 302°F (short stem)

④ remote 446°F (extended stem)

⑤ remote 752°F (extended stem)

Dimension B for meters with Stainless Steel measuring tubes

	mm (±5)									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
PN16										
DN80	-	-	-	-	-	-	970	-	-	-
DN100	-	-	-	-	-	-	1000	1154	-	-
DN150	-	-	-	-	-	-	-	1200	1572	-
DN200	-	-	-	-	-	-	-	-	1586	-
DN250	-	-	-	-	-	-	-	-	-	2100
DN300	-	-	-	-	-	-	-	-	-	2026
PN40										
DN10	335	347	-	-	-	-	-	-	-	-
DN15	341	353	510	-	-	-	-	-	-	-
DN25	-	-	514	600	-	-	-	-	-	-
DN40	-	-	-	610	709	-	-	-	-	-
DN50	-	-	-	-	715	895	-	-	-	-
DN80	-	-	-	-	-	915	986	-	-	-
DN100	-	-	-	-	-	-	1000	1180	-	-
DN150	-	-	-	-	-	-	-	1200	1612	-
DN200	-	-	-	-	-	-	-	-	1638	-
DN250	-	-	-	-	-	-	-	-	-	2080
DN300	-	-	-	-	-	-	-	-	-	2100
PN63										
DN50	-	-	-	-	743	923	-	-	-	-
DN80	-	-	-	-	-	943	1014	-	-	-
DN100	-	-	-	-	-	-	1026	1206	-	-

mm (± 5)										
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
DN150	-	-	-	-	-	-	-	1240	1652	-
DN200	-	-	-	-	-	-	-	-	1682	-
DN250	-	-	-	-	-	-	-	-	-	2120
DN300	-	-	-	-	-	-	-	-	-	2150
PN100										
DN10	355	367	-	-	-	-	-	-	-	-
DN15	355	367	524	-	-	-	-	-	-	-
DN25	-	-	550	636	-	-	-	-	-	-
DN40	-	-	-	644	743	-	-	-	-	-
DN50	-	-	-	-	755	935	-	-	-	-
DN80	-	-	-	-	-	955	1026	-	-	-
DN100	-	-	-	-	-	-	1050	1230	-	-
DN150	-	-	-	-	-	-	-	1280	1692	-
DN200	-	-	-	-	-	-	-	-	1722	-
DN250	-	-	-	-	-	-	-	-	-	2184
DN300	-	-	-	-	-	-	-	-	-	2210
ASME 150										
$\frac{1}{2}''$	361	373	530	-	-	-	-	-	-	-
$\frac{3}{4}''$	-	-	540	-	-	-	-	-	-	-
1"	-	-	546	632	-	-	-	-	-	-
$1\frac{1}{2}''$	-	-	-	644	743	-	-	-	-	-
2"	-	-	-	-	747	926	-	-	-	-
3"	-	-	-	-	-	939	1010	-	-	-
4"	-	-	-	-	-	-	1022	1202	-	-
6"	-	-	-	-	-	-	-	1228	1640	-
8"	-	-	-	-	-	-	-	-	1666	-
10"	-	-	-	-	-	-	-	-	-	2074
12"	-	-	-	-	-	-	-	-	-	2100
ASME 300										
$\frac{1}{2}''$	371	383	540	-	-	-	-	-	-	-
$\frac{3}{4}''$	-	-	550	-	-	-	-	-	-	-
1"	-	-	558	644	-	-	-	-	-	-
$1\frac{1}{2}''$	-	-	-	658	757	-	-	-	-	-
2"	-	-	-	-	759	939	-	-	-	-
3"	-	-	-	-	-	957	1028	-	-	-
4"	-	-	-	-	-	-	1042	1222	-	-
6"	-	-	-	-	-	-	-	1246	1658	-
8"	-	-	-	-	-	-	-	-	1686	-
10"	-	-	-	-	-	-	-	-	-	2106
12"	-	-	-	-	-	-	-	-	-	2132

2 TECHNICAL DATA

OPTIMASS 6000

	mm (± 5)									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
ASME 600										
½"	383	395	552	-	-	-	-	-	-	-
¾"	-	-	562	-	-	-	-	-	-	-
1"	-	-	572	658	-	-	-	-	-	-
1½"	-	-	-	674	773	-	-	-	-	-
2"	-	-	-	-	779	959	-	-	-	-
3"	-	-	-	-	-	977	1048	-	-	-
4"	-	-	-	-	-	-	1086	1266	-	-
6"	-	-	-	-	-	-	-	1298	1710	-
8"	-	-	-	-	-	-	-	-	1742	-
10"	-	-	-	-	-	-	-	-	-	2186
12"	-	-	-	-	-	-	-	-	-	2194
JIS 10K										
50A	-	-	-	-	715	895	-	-	-	-
80A	-	-	-	-	-	915	986	-	-	-
100A	-	-	-	-	-	-	1022	1202	-	-
150A	-	-	-	-	-	-	-	1202	1652	-
200A	-	-	-	-	-	-	-	-	1666	-
250A	-	-	-	-	-	-	-	-	-	2106
300A	-	-	-	-	-	-	-	-	-	2124
JIS 20K										
10A	341	353	-	-	-	-	-	-	-	-
15A	341	353	510	-	-	-	-	-	-	-
25A	-	-	514	600	-	-	-	-	-	-
40A	-	-	-	610	709	-	-	-	-	-
50A	-	-	-	-	715	895	-	-	-	-
80A	-	-	-	-	-	915	986	-	-	-
100A	-	-	-	-	-	-	1022	1240	-	-
150A	-	-	-	-	-	-	-	1240	1652	-
200A	-	-	-	-	-	-	-	-	1666	-
250A	-	-	-	-	-	-	-	-	-	2106
300A	-	-	-	-	-	-	-	-	-	2124

	inches (± 0.2)									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
PN16										
DN80	-	-	-	-	-	-	38.2	-	-	-
DN100	-	-	-	-	-	-	39.3	45.4	-	-
DN150	-	-	-	-	-	-	-	47.2	61.9	-
DN200	-	-	-	-	-	-	-	-	62.4	-

	inches (± 0.2)									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
DN250	-	-	-	-	-	-	-	-	-	82.7
DN300	-	-	-	-	-	-	-	-	-	79.8
PN40										
DN10	13.2	13.7	-	-	-	-	-	-	-	-
DN15	13.4	13.9	20.1	-	-	-	-	-	-	-
DN25	-	-	20.2	23.6	-	-	-	-	-	-
DN40	-	-	-	24	27.9	-	-	-	-	-
DN50	-	-	-	-	28.1	35.2	-	-	-	-
DN80	-	-	-	-	-	36	38.8	-	-	-
DN100	-	-	-	-	-	-	39.4	46.4	-	-
DN150	-	-	-	-	-	-	-	47.2	63.5	-
DN200	-	-	-	-	-	-	-	-	64.5	-
DN250	-	-	-	-	-	-	-	-	-	81.9
DN300	-	-	-	-	-	-	-	-	-	82.7
PN63										
DN50	-	-	-	-	29.2	36.3	-	-	-	-
DN80	-	-	-	-	-	37.1	39.9	-	-	-
DN100	-	-	-	-	-	-	40.4	47.5	-	-
DN150	-	-	-	-	-	-	-	48.8	65	-
DN200	-	-	-	-	-	-	-	-	66.2	-
DN250	-	-	-	-	-	-	-	-	-	83.5
DN300	-	-	-	-	-	-	-	-	-	84.6
PN100										
DN10	14	14.4	-	-	-	-	-	-	-	-
DN15	14	14.4	20.6	-	-	-	-	-	-	-
DN25	-	-	21.6	25	-	-	-	-	-	-
DN40	-	-	-	25.3	29.2	-	-	-	-	-
DN50	-	-	-	-	29.7	36.8	-	-	-	-
DN80	-	-	-	-	-	37.6	40.4	-	-	-
DN100	-	-	-	-	-	-	41.3	48.4	-	-
DN150	-	-	-	-	-	-	-	50.4	66.6	-
DN200	-	-	-	-	-	-	-	-	67.8	-
DN250	-	-	-	-	-	-	-	-	-	85.9
DN300	-	-	-	-	-	-	-	-	-	87
ASME 150										
$\frac{1}{2}$ "	14.2	14.7	20.9	-	-	-	-	-	-	-
$\frac{3}{4}$ "	-	-	21.2	-	-	-	-	-	-	-
1"	-	-	21.5	24.9	-	-	-	-	-	-
$1\frac{1}{2}$ "	-	-	-	25.3	29.2	-	-	-	-	-
2"	-	-	-	-	29.4	36.5	-	-	-	-
3"	-	-	-	-	-	37	39.8	-	-	-

2 TECHNICAL DATA

OPTIMASS 6000

	inches (± 0.2)									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
4"	-	-	-	-	-	-	40.2	47.3	-	-
6"	-	-	-	-	-	-	-	48.3	64.6	-
8"	-	-	-	-	-	-	-	-	65.6	-
10"	-	-	-	-	-	-	-	-	-	81.6
12"	-	-	-	-	-	-	-	-	-	82.7
ASME 300										
½"	14.6	15.1	21.2	-	-	-	-	-	-	-
¾"	-	-	21.6	-	-	-	-	-	-	-
1"	-	-	22	25.3	-	-	-	-	-	-
1½"	-	-	-	25.9	29.8	-	-	-	-	-
2"	-	-	-	-	30	37	-	-	-	-
3"	-	-	-	-	-	37.7	40.5	-	-	-
4"	-	-	-	-	-	-	41	48.1	-	-
6"	-	-	-	-	-	-	-	49	65.3	-
8"	-	-	-	-	-	-	-	-	66.4	-
10"	-	-	-	-	-	-	-	-	-	82.9
12"	-	-	-	-	-	-	-	-	-	83.9
ASME 600										
½"	15.1	15.5	21.7	-	-	-	-	-	-	-
¾"	-	-	22.1	-	-	-	-	-	-	-
1"	-	-	22.5	25.9	-	-	-	-	-	-
1½"	-	-	-	26.5	30.4	-	-	-	-	-
2"	-	-	-	-	30.7	37.7	-	-	-	-
3"	-	-	-	-	-	38.5	41.2	-	-	-
4"	-	-	-	-	-	-	42.8	49.8	-	-
6"	-	-	-	-	-	-	-	51.1	67.3	-
8"	-	-	-	-	-	-	-	-	68.6	-
10"	-	-	-	-	-	-	-	-	-	86
12"	-	-	-	-	-	-	-	-	-	86.4
JIS 10K										
50A	-	-	-	-	28.2	35.2	-	-	-	-
80A	-	-	-	-	-	36	38.8	-	-	-
100A	-	-	-	-	-	-	40.2	47.3	-	-
150A	-	-	-	-	-	-	-	47.3	65	-
200A	-	-	-	-	-	-	-	-	65.5	-
250A	-	-	-	-	-	-	-	-	-	82.9
300A	-	-	-	-	-	-	-	-	-	83.6
JIS 20K										
10A	13.4	13.9	-	-	-	-	-	-	-	-
15A	13.4	13.9	20	-	-	-	-	-	-	-
25A	-	-	20.2	23.6	-	-	-	-	-	-

	inches (± 0.2)									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
40A	-	-	-	24	27.9	-	-	-	-	-
50A	-	-	-	-	28.2	35.2	-	-	-	-
80A	-	-	-	-	-	36	38.8	-	-	-
100A	-	-	-	-	-	-	40.2	48.8	-	-
150A	-	-	-	-	-	-	-	48.8	65	-
200A	-	-	-	-	-	-	-	-	62.6	-
250A	-	-	-	-	-	-	-	-	-	82.9
300A	-	-	-	-	-	-	-	-	-	83.6

Dimension B for meters with Hastelloy® and Stainless Steel (UNS S31803) measuring tubes

	mm									
	H08	H10	H15	H25	H50	H80	D100	D150	D200	
PN40										
DN15	328	353	-	-	-	-	-	-	-	-
DN25	-	-	510	-	-	-	-	-	-	-
DN40	-	-	-	600	-	-	-	-	-	-
DN50	-	-	-	-	715	-	-	-	-	-
DN80	-	-	-	-	-	915	-	-	-	-
PN63										
DN50	-	-	-	-	715	-	-	-	-	-
DN80	-	-	-	-	-	915	-	-	-	-
PN100										
DN15	328	353	-	-	-	-	-	-	-	-
DN25	-	-	510	-	-	-	-	-	-	-
DN40	-	-	-	600	-	-	-	-	-	-
DN50	-	-	-	-	715	-	-	-	-	-
DN80	-	-	-	-	-	915	-	-	-	-
PN160										
DN15	328	353	-	-	-	-	-	-	-	-
DN25	-	-	510	-	-	-	-	-	-	-
DN40	-	-	-	600	-	-	-	-	-	-
DN50	-	-	-	-	715	-	-	-	-	-
DN80	-	-	-	-	-	915	1042	-	-	-
DN100	-	-	-	-	-	-	1070	1250	-	-
DN150	-	-	-	-	-	-	-	1306	1718	-
DN200	-	-	-	-	-	-	-	-	-	1742
ASME 150										
½"	328	353	-	-	-	-	-	-	-	-
1"	-	-	510	-	-	-	-	-	-	-
1½"	-	-	-	600	-	-	-	-	-	-
2"	-	-	-	-	715	-	-	-	-	-

	mm									
	H08	H10	H15	H25	H50	H80	D100	D150	D200	
3"	-	-	-	-	-	915	-	-	-	
ASME 300										
½"	328	353	-	-	-	-	-	-	-	
1"	-	-	510	-	-	-	-	-	-	
1½"	-	-	-	600	-	-	-	-	-	
2"	-	-	-	-	715	-	-	-	-	
3"	-	-	-	-	-	915	-	-	-	
ASME 600										
½"	328	353	-	-	-	-	-	-	-	
1"	-	-	510	-	-	-	-	-	-	
1½"	-	-	-	600	-	-	-	-	-	
2"	-	-	-	-	715	-	-	-	-	
3"	-	-	-	-	-	915	-	-	-	
ASME 900										
1½"	-	-	-	600	-	-	-	-	-	
2"	-	-	-	-	715	-	-	-	-	
3"	-	-	-	-	-	915	1086	-	-	
4"	-	-	-	-	-	-	1112	1292	-	
6"	-	-	-	-	-	-	-	1342	1754	
8"	-	-	-	-	-	-	-	-	1798	
ASME 1500										
½"	328	353	-	-	-	-	-	-	-	
1"	-	-	510	-	-	-	-	-	-	
1½"	-	-	-	600	-	-	-	-	-	
2"	-	-	-	-	715	-	-	-	-	
3"	-	-	-	-	-	915	1118	-	-	
4"	-	-	-	-	-	-	1130	1310	-	
6"	-	-	-	-	-	-	-	1406	1818	
8"	-	-	-	-	-	-	-	-	1900	
JIS 10K										
50A	-	-	-	-	715	-	-	-	-	
80A	-	-	-	-	-	915	-	-	-	
JIS 20K										
15A	328	353	-	-	-	-	-	-	-	
25A	-	-	510	-	-	-	-	-	-	
40A	-	-	-	600	-	-	-	-	-	
50A	-	-	-	-	715	-	-	-	-	
80A	-	-	-	-	-	915	-	-	-	

	inches									
	H08	H10	H15	H25	H50	H80	D100	D150	D200	
PN40										
DN15	12.9	13.9	-	-	-	-	-	-	-	-
DN25	-	-	20.1	-	-	-	-	-	-	-
DN40	-	-	-	23.6	-	-	-	-	-	-
DN50	-	-	-	-	28.1	-	-	-	-	-
DN80	-	-	-	-	-	36	-	-	-	-
PN63										
DN50	-	-	-	-	28.1	-	-	-	-	-
DN80	-	-	-	-	-	36	-	-	-	-
PN100										
DN15	12.9	13.9	-	-	-	-	-	-	-	-
DN25	-	-	20.1	-	-	-	-	-	-	-
DN40	-	-	-	23.6	-	-	-	-	-	-
DN50	-	-	-	-	28.1	-	-	-	-	-
DN80	-	-	-	-	-	36	-	-	-	-
PN160										
DN15	12.9	13.9	-	-	-	-	-	-	-	-
DN25	-	-	20.1	-	-	-	-	-	-	-
DN40	-	-	-	23.6	-	-	-	-	-	-
DN50	-	-	-	-	28.1	-	-	-	-	-
DN80	-	-	-	-	-	36	41	-	-	-
DN100	-	-	-	-	-	-	42.1	49.2	-	-
DN150	-	-	-	-	-	-	-	51.4	67.6	-
DN200	-	-	-	-	-	-	-	-	-	68.6
ASME 150										
½"	12.9	13.9	-	-	-	-	-	-	-	-
1"	-	-	20.1	-	-	-	-	-	-	-
1½"	-	-	-	23.6	-	-	-	-	-	-
2"	-	-	-	-	28.1	-	-	-	-	-
3"	-	-	-	-	-	36	-	-	-	-
ASME 300										
½"	12.9	13.9	-	-	-	-	-	-	-	-
1"	-	-	20.1	-	-	-	-	-	-	-
1½"	-	-	-	23.6	-	-	-	-	-	-
2"	-	-	-	-	28.1	-	-	-	-	-
3"	-	-	-	-	-	36	-	-	-	-
ASME 600										
½"	12.9	13.9	-	-	-	-	-	-	-	-
1"	-	-	20.1	-	-	-	-	-	-	-
1½"	-	-	-	23.6	-	-	-	-	-	-
2"	-	-	-	-	28.1	-	-	-	-	-
3"	-	-	-	-	-	36	-	-	-	-

	inches									
	H08	H10	H15	H25	H50	H80	D100	D150	D200	
ASME 900										
1½"	-	-	-	23.6	-	-	-	-	-	-
2"	-	-	-	-	28.1	-	-	-	-	-
3"	-	-	-	-	-	36	42.7	-	-	-
4"	-	-	-	-	-	-	43.7	50.9	-	-
6"	-	-	-	-	-	-	-	52.7	69	
8"	-	-	-	-	-	-	-	-	70.8	
ASME 1500										
½"	12.9	13.9	-	-	-	-	-	-	-	-
1"	-	-	20.1	-	-	-	-	-	-	-
1½"	-	-	-	23.6	-	-	-	-	-	-
2"	-	-	-	-	28.1	-	-	-	-	-
3"	-	-	-	-	-	36	44	-	-	-
4"	-	-	-	-	-	-	44.5	51.6	-	-
6"	-	-	-	-	-	-	-	55.3	71.6	
8"	-	-	-	-	-	-	-	-	74.8	
JIS 10K										
50A	-	-	-	-	28.1	-	-	-	-	-
80A	-	-	-	-	-	36	-	-	-	-
JIS 20K										
15A	12.9	13.9	-	-	-	-	-	-	-	-
25A	-	-	20.1	-	-	-	-	-	-	-
40A	-	-	-	23.6	-	-	-	-	-	-
50A	-	-	-	-	28.1	-	-	-	-	-
80A	-	-	-	-	-	36	-	-	-	-


2.4.2 NAMUR dimensions

The following face to face dimensions comply with NAMUR NE132

	mm (± 3)							
	S15	S25	S50	S80	S100	S150	S250	
PN10								
DN250	-	-	-	-	-	-	-	2100
PN16								
DN100	-	-	-	-	1000	-	-	-
DN150	-	-	-	-	-	1200	-	-
DN200	-	-	-	-	-	-	-	2100
PN40								
DN 15	510	-	-	-	-	-	-	-
DN 25	-	600	-	-	-	-	-	-
DN 50	-	-	715	-	-	-	-	-
DN 80	-	-	-	915	-	-	-	-

	inches (± 0.12)							
	S15	S25	S50	S80	S100	S150	S250	
PN10								
DN250	-	-	-	-	-	-	-	82.7
PN16								
DN100	-	-	-	-	39.4	-	-	-
DN150	-	-	-	-	-	47.2	-	-
DN200	-	-	-	-	-	-	-	82.7
PN40								
DN 15	20.1	-	-	-	-	-	-	-
DN 25	-	23.6	-	-	-	-	-	-
DN 50	-	-	28.1	-	-	-	-	-
DN 80	-	-	-	36	-	-	-	-

2.4.3 Hygienic versions

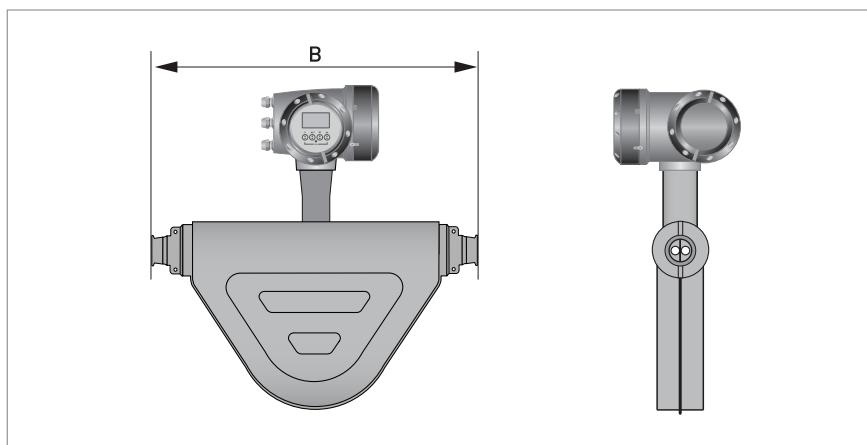

Dimension B for meters with Stainless Steel measuring tubes


	mm (± 5)					
	S08	S10	S15	S25	S50	S80
Tri-clover						
½"	308	320	-	-	-	-
1"	-	-	477	-	-	-
1½"	-	-	-	563	-	-
2"	-	-	-	-	662	-
3"	-	-	-	-	-	842
Tri-clamp DIN 32676						
DN15	301	313	-	-	-	-
DN25	-	-	477	-	-	-
DN40	-	-	-	563	-	-
DN50	-	-	-	-	662	-
DN80	-	-	-	-	-	855
Tri-clamp ISO 2852						
1"	-	-	483	-	-	-
1½"	-	-	-	569	-	-
2"	-	-	-	-	668	-
3"	-	-	-	-	-	848
DIN 11864-2 Form A (female)						
DN15	345	357	-	-	-	-
DN25	-	-	514	-	-	-
DN40	-	-	-	610	-	-
DN50	-	-	-	-	709	-
DN80	-	-	-	-	-	915
Male thread DIN 11851						
DN15	307	319	-	-	-	-
DN25	-	-	492	-	-	-

	mm (± 5)					
	S08	S10	S15	S25	S50	S80
DN40	-	-	-	586	-	-
DN50	-	-	-	-	689	-
DN80	-	-	-	-	-	889
Male thread SMS						
1"	-	-	464	-	-	-
1½"	-	-	-	566	-	-
2"	-	-	-	-	665	-
3"	-	-	-	-	-	847

	inches (± 0.2)					
	S08	S10	S15	S25	S50	S80
Tri-clover						
½"	12.1	12.6	-	-	-	-
1"	-	-	18.8	-	-	-
1½"	-	-	-	22.2	-	-
2"	-	-	-	-	26	-
3"	-	-	-	-	-	33.1
Tri-clamp DIN 32676						
DN15	11.8	12.3	-	-	-	-
DN25	-	-	18.8	-	-	-
DN40	-	-	-	22.2	-	-
DN50	-	-	-	-	26	-
DN80	-	-	-	-	-	33.7
Tri-clamp ISO 2852						
1"	-	-	19	-	-	-
1½"	-	-	-	22.4	-	-
2"	-	-	-	-	26.3	-
3"	-	-	-	-	-	33.4
DIN 11864-2 Form A (female)						
DN15	13.6	14	-	-	-	-
DN25	-	-	20.2	-	-	-
DN40	-	-	-	24	-	-
DN50	-	-	-	-	27.9	-
DN80	-	-	-	-	-	36
Male thread DIN 11851						
DN15	12	12.5	-	-	-	-
DN25	-	-	19.4	-	-	-
DN40	-	-	-	23	-	-
DN50	-	-	-	-	27.1	-
DN80	-	-	-	-	-	35

	inches (± 0.2)					
	S08	S10	S15	S25	S50	S80
Male thread SMS						
1"	-	-	18.3	-	-	-
1½"	-	-	-	22.3	-	-
2"	-	-	-	-	26.2	-
3"	-	-	-	-	-	33.3

2.4.4 Heating jacket version

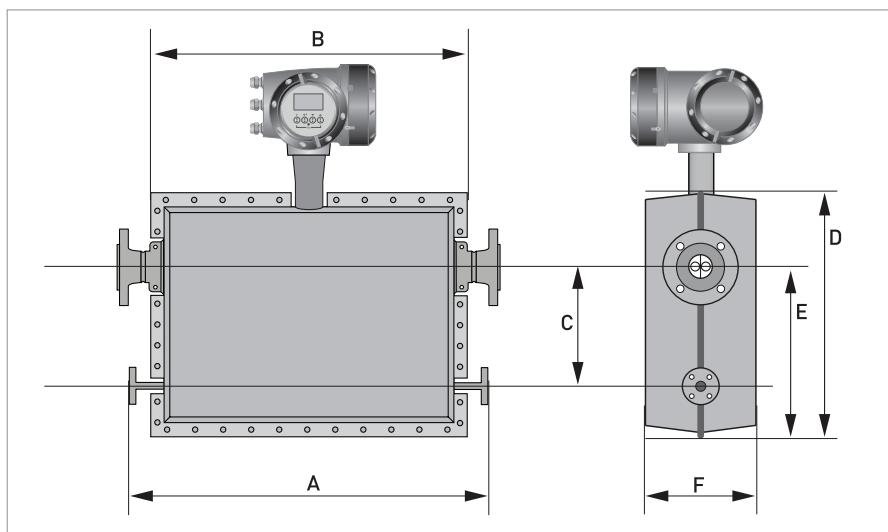


General dimensions

	mm									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
Heating connection size: PN40 DN15 or ASME 150 ½"										
A ±5.0	435	590	692	715	891	956	1139	TBA	TBA	
B ±3.0	283	440	542	565	741	806	989	TBA	TBA	
C ±3.0	100	130	210	230	320	340	450	TBA	TBA	
D ±3.0	315	344	453	499	622	682	844	TBA	TBA	
E ±3.0	198	221	316	356	451	486	617	TBA	TBA	
F ±3.0	232	226	254	266	322	372	428	TBA	TBA	

	inches									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
Heating connection size: PN40 DN15 or ASME 150 ½"										
A ±0.2	17.1	23.2	27.2	28.1	35.1	37.6	44.8	TBA	TBA	
B ±0.12	11.1	17.3	21.3	22.2	29.2	31.7	38.9	TBA	TBA	
C ±0.12	3.9	5.1	8.3	9	12.6	13.4	17.7	TBA	TBA	
D ±0.12	12.4	13.5	17.8	19.6	24.5	26.8	33.2	TBA	TBA	
E ±0.12	7.8	8.7	12.4	14	17.7	19.1	24.3	TBA	TBA	
F ±0.12	9.1	8.9	10	10.5	12.7	14.6	16.8	TBA	TBA	

2.4.5 Purge port option

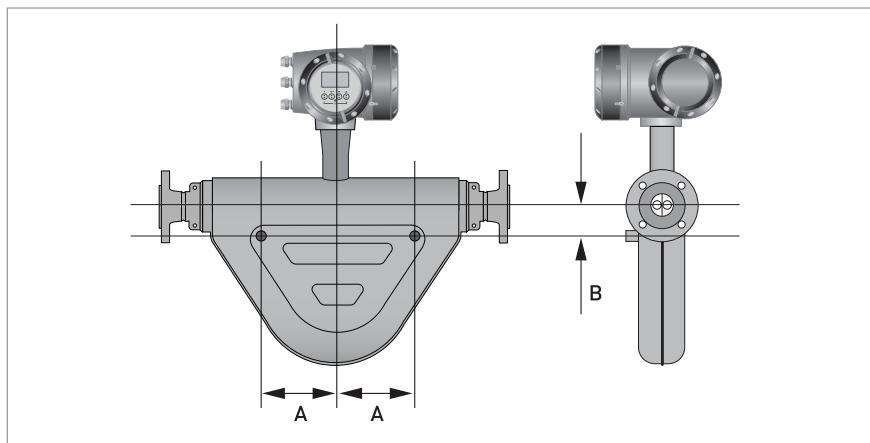


Dimensions

	mm									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
A	70	110	145	150	205	220	345	600	800	
B	32	45	57	60		85		100	160	140

	inches									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
A	2.7	4.3	5.7	5.9	8.1	8.7	13.6	23.6	31.5	
B	1.3	1.8	2.2	2.4		3.3		3.9	6.3	5.5

2.4.6 Burst disc option

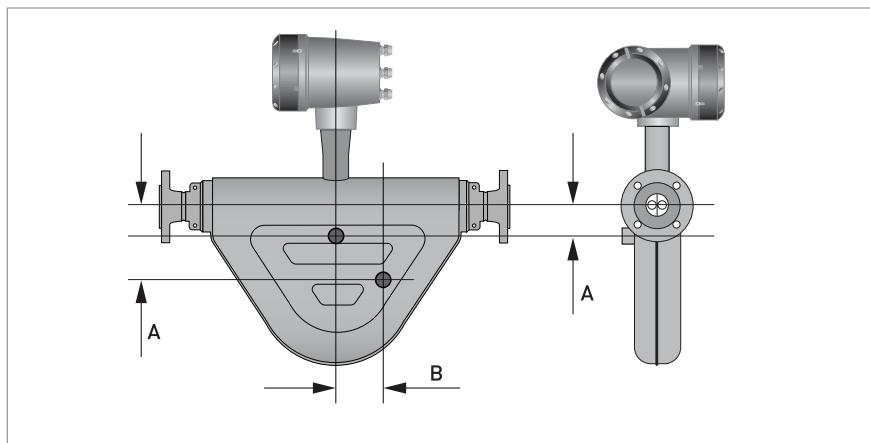

Dimensions

	mm									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
A	76	92	135	57	74		175	160	220	
B	38.5	62	0	0	0	0	0	0	0	60

	inches									
	S08	S10	S15	S25	S50	S80	S100	S150	S200	S250
A	3.0	3.6	5.3	2.2	2.9		6.9	6.3	8.7	
B	1.52	2.4	0	0	0	0	0	0	0	2.4

3.1 Intended use

This mass flowmeter is designed for the direct measurement of mass flow rate, product density and product temperature. Indirectly, it also enables the measurement of parameters like total mass, concentration of dissolved substances and the volume flow. For use in hazardous areas, special codes and regulations are also applicable and these are specified in a separate documentation.

Responsibility for the use of the measuring devices with regard to suitability, intended use and corrosion resistance of the used materials against the measured fluid lies solely with the operator.

This device is a Group 1, Class A device as specified within CISPR11:2009. It is intended for use in industrial environment. There may be potential difficulties in ensuring electromagnetic compatibility in other environments, due to conducted as well as radiated disturbances.







The manufacturer is not liable for any damage resulting from improper use or use for other than the intended purpose.

3.2 Mounting restrictions

3.2.1 General installation principles

There are no special installation requirements but you should note the following points:

- Support the weight of the meter as close to the meter body as possible.
- Mount the meter in such a way to avoid the build up of gas or liquid in the measuring tube.
- Straight runs either side of the meter are not required.
- The use of reducers and other fittings at flanges, including flexible hoses, is allowed but you should take care to avoid cavitation.
- Avoid extreme pipe size reductions.
- Meters are not affected by crosstalk and can be mounted in series or in parallel.
- Avoid mounting the meter at the highest point in the pipeline where air / gas can collect.

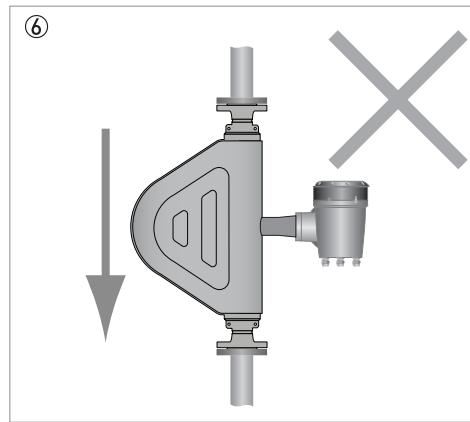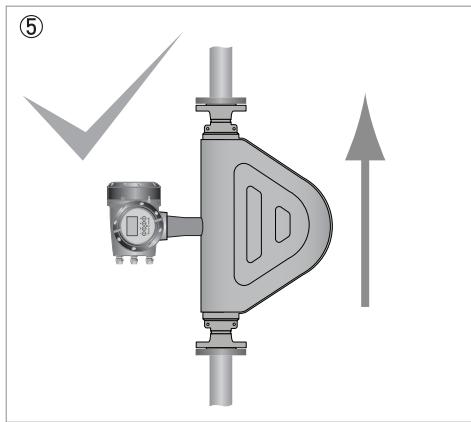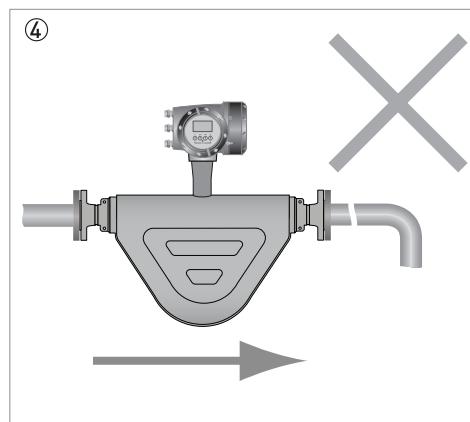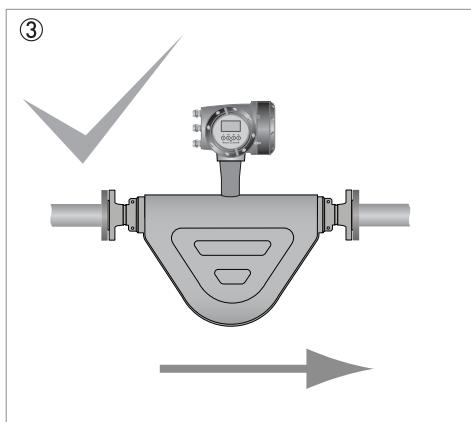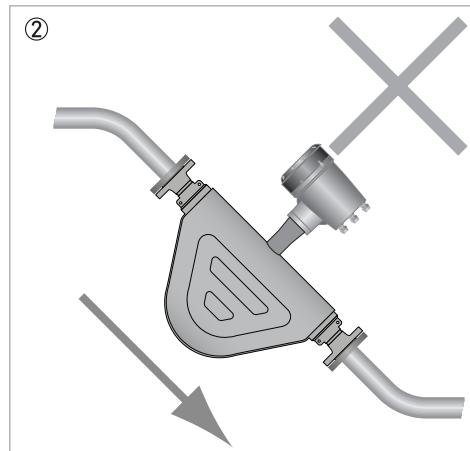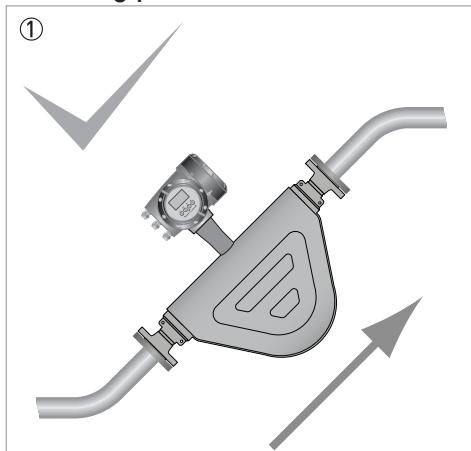Mounting positions

- ① The meter can be mounted at an angle but it is recommended that the flow is uphill.
- ② Avoid mounting the meter with the flow running downhill because it can cause siphoning. If the meter has to be mounted with the flow running downhill, install an orifice plate or control valve downstream of the meter to maintain backpressure.
- ③ Horizontal mounting with flow running left to right.
- ④ Avoid mounting meter with long vertical runs after the meter as it can cause cavitation. Where the installation includes a vertical run after the meter, install an orifice plate or control valve downstream to maintain backpressure.
- ⑤ The meter can be mounted vertically but it is recommended that the flow is uphill.
- ⑥ Avoid mounting the meter vertically with the flow running downhill. This can cause siphoning. If the meter has to be installed this way, install an orifice plate or control valve downstream to maintain backpressure.

Comprehensive installation guidance is provided in the Handbook







KROHNE – Process instrumentation and measurement solutions

- Flow
- Level
- Temperature
- Pressure
- Process Analysis
- Services

Head Office KROHNE Messtechnik GmbH
Ludwig-Krohne-Str. 5
47058 Duisburg (Germany)
Tel.: +49 203 301 0
Fax: +49 203 301 10389
info@krohne.com

The current list of all KROHNE contacts and addresses can be found at:
www.krohne.com